



AXIOM AXM WIRING ACCESSORIES

COMPLETE

FULLY  APPROVED

DIGITAL PRODUCT CATALOGUE



CED ELECTRICAL GROUP



AXM
Reduced Pricing
across the entire range
now available.

FULLY  APPROVED

AXIOM AXM WIRING ACCESORIES

Axiom **AXM** Accessories are a new comprehensive range of traditional white moulded wiring accessories, priced to meet the day to day needs of electrical contractors and guaranteed for 25 years. This **AXM** range is a classic CED Electrical Group product, designed and manufactured to high quality standards yet priced very competitively – offering excellent value for money and profit maximising opportunities for stockists. Over fifty product lines include 10A to 45A switches; 13A sockets, spurs and connections units; AV sockets; dimmer switches; dry lining and pattress boxes plus lamp holders and ceiling switches – many of which are ASTA approved and all are CE marked.

All CED Axiom Contractor Wiring Accessories have been specially designed to ensure they meet the contractor need for reliable products at a competitive price point and can be purchase safe in the knowledge that they meets all current standards.



SWITCHES

Switches (10A)

Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Colour:- White
- Guarantee:- 25 Years
- Supplied with M3.5 x 30mm fixing screws and screw covers
- Front Plate Depth - Single Pole - 9mm & Double Pole - 13mm



NEW



Dimensions
86 x 86 x 9mm

Fixing Centre
60.3mm

Minimum Box Depth
16mm



Code: **AXMS11**

1 Gang 1 Way Light Switch

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit



Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
16mm



Code: AXMS12

1 Gang 2 Way Light Switch

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g	1G	v
66.7	2W	240

Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
16mm



Code: AXMS22

2 Gang 2 Way Light Switch

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g	2G	v
71.5	2W	240

Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
16mm



Code: AXMS32

3 Gang 2 Way Light Switch

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g	3G	v
100.9	2W	240

Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 146 x 9mm
Fixing Centre
120.6mm
Minimum Box Depth
16mm



Code: AXMS42

4 Gang 2 Way Light Switch

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g	4G	v
n/a	2W	240

Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

* Minimum order quantity 10

SWITCHES

Switches (10A)

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
16mm



Code: **AXMSINT**

1 Gang Intermediate

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g n/a	1G n/a	v 240
----------	-----------	----------

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
16mm



Code: **AXMFI3P**

1 Gang Fan

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g 100.9	1G n/a	v 240
------------	-----------	----------

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
87 x 20 x 32mm
Fixing Centre
60.3mm (Vertical)
Minimum Box Depth
32mm



Code: **AXMSARC**

1 Gang Architrave

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g n/a	1G n/a	v 240
----------	-----------	----------

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
16mm



Code: **AXMSBELL**

1 Gang Bell

- 10Amp (X rated) suitable for inductive load
- Supplied with M3.5 x 25mm fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Terminal Capacity - 3x1.5mm²
- Three Pole Isolators provide isolation of fans for maintenance or repair without isolation of complete circuit

g n/a	1G n/a	v 240
----------	-----------	----------

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

* Minimum order quantity 10



SWITCHES

Switches (20A)



Features & Benefits

- Approvals:- (CE)
- Construction:- Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Colour:- White
- Guarantee:- 25 Years



NEW




Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm (Vertical)
Minimum Box Depth
25mm

Code: AXMS20

20A Switch (Double Pole)

- Flex outlet at lower edge by knockout (choice of use)
- Supplied with M3.5 x 30mm fixing screws
- Cable Clamp accommodates 2.5mm² flexible cable
- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Terminal Capacity - 3 x 2.5mm², 4 x 2.5mm² (Earth)



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm

Code: AXMS20N

20A Switch + Neon (Double Pole)

- Flex outlet at lower edge by knockout (choice of use)
- Supplied with M3.5 x 30mm fixing screws
- Cable Clamp accommodates 2.5mm² flexible cable
- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Terminal capacity - 3 x 2.5mm², 4 x 2.5mm² (Earth)



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

* Minimum order quantity 10

SOCKETS

Single & Twin Sockets (13A)



Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- White Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws and screw covers



NEW



Dimensions
86 x 86 x 9mm

Fixing Centre
60.3mm

Minimum Box Depth
25mm



Code: **AXMSK1**

1 Gang Unswitched 13A

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Single Pole - 9mm



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
87 x 20 x 32mm

Fixing Centre
60.3mm (Vertical)

Minimum Box Depth
25mm



Code: **AXMSSK1**

1 Gang Switched 13A

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Single Pole - 9mm



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW

Dimensions
86 x 86 x 9mm

Fixing Centre
60.3mm

Minimum Box Depth
25mm



Code: **AXMSSK1/USB**

1 Gang Switched/USB 13A

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Single Pole - 9mm



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

* Minimum order quantity 10

NEW



Dimensions
86 x 146 x 9mm
Fixing Centre
120.6mm
Minimum Box Depth
25mm



Code: **AXMSK2**

2 Gang Unswitched 13A

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 4x2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Single Pole - 9mm



Minimum / Box quantity: 10/100

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 146 x 9mm
Fixing Centre
120.6mm
Minimum Box Depth
25mm



Code: **AXMSSK2**

2 Gang Switched 13A

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Single Pole - 9mm



Minimum / Box quantity: 10/100

Each

Minimum order quantity: 10

NEW


Dimensions
86 x 146 x 9mm
Fixing Centre
120.6mm
Minimum Box Depth
25mm



Code: **AXMSSK2/USB**

2 Gang Switched/USB 13A

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Single Pole - 9mm



Minimum / Box quantity: 10/100

Each

Minimum order quantity: 10

NEW




Dimensions
86 x 146 x 9mm
Fixing Centre
120.6mm
Minimum Box Depth
25mm



Code: **AXMSSK2DP**

2 Gang Switched 13A DP

- Contact Gap - 3mm
- Minimum Depth - Plastic/PVC box - 25mm
- Terminal Capacity - 3 x 2.5mm² (13Amp only)
- 2 Earth Terminals for easy installation - Single Pole
- Supplied with M3.5 x 30mm fixing screws
- Front Plate Depth - Double Pole - 9mm



Minimum / Box quantity: 10/100

Each

Minimum order quantity: 10

* Minimum order quantity 10

SOCKETS

Blank Plates & Shaver Sockets (110v/240v)

NEW



Dimensions
86 x 86 x 9mm

Fixing Centre
60.3mm

Minimum Box Depth
16mm



Code: **AXMBP1**

1 Gang Blank Plate

- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Designed to cover 1 Gang Flush Boxes
- Supplied with M3.5 x 25mm (long) fixing screws
- Conforms to BS 5733

Minimum / Box quantity: 10/200

Minimum order quantity: 10



Each

NEW



Dimensions
86 x 146 x 9mm

Fixing Centre
120.6mm

Minimum Box Depth
16mm



Code: **AXMBP2**

2 Gang Blank Plate

- Supplied with M3.5 x 25mm long fixing screws
- Minimum Depth - Metal/Plastic/PVC Box 16mm
- Designed to cover 2 Gang Flush Boxes

Minimum / Box quantity: 10/100

Minimum order quantity: 10



Each

NEW



Dimensions
146 x 86 x 13mm

Fixing Centre
120.6mm (Vertical)

Minimum Box Depth
47mm



Code: **AXMWSS1DV**

110/240v Dual 20vA

- Input 240v AC - Output 240v or 110v
- Terminal Capacity - 2 x 2.5mm²
- Maximum Depth - Metal/Plastic/PVC Box 47mm
- Supplied with M3.5 x 30mm fixing screws

Minimum / Box quantity: 10/100

Minimum order quantity: 10



Each

Profit Maximiser...

The AXM range was developed as a select range of essential electrical lines to provide increased profitability potential for our customers. We tailor made the range to support items that are staple purchases within the electrical trade.

...Please call our sales team
or speak to your area sales manager for more details.

FULLY  APPROVED

NEW



Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- White Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Supplied with M3.5 x 30mm fixing screws and screw covers
- Complete with a 25 years guarantee



Suitable for use in commercial & domestic environments

LIGHTING

Lampholders & Ceiling Switches (10A & 45A)

NEW



Dimensions
Ø88 x 256mm

Fixing Centre
n/a

Minimum Box Depth
n/a



Code: **CEDPS6T2**

Pendant Set 6" Drop T2 100W to BS60598-2-1

- Clear Poly-carbonate Base
- Heat resistant cable 0.75mm² 2 core (BASEC approved - BS 6141)
- Terminal Capacity - 2 x 1.5mm² / Rated Load Capacity - 2A
- T2 - lamp holder (LHT2S) metal insert and ceiling rose (CR3TE)
- BS EN-60598-2-1

g	2A	v
126	n/a	250

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each	120+	240+
------	------	------

NEW



Dimensions
86 x 86 x 13mm

Fixing Centre
60.3mm

Minimum Box Depth
25mm



Code: **AXMCLS45N**

Ceiling Switch 45A + Neon (Double Pole)

- Indicator complies with IEC-16th wiring regulations
- 3mm contact gap when in off position
- Terminal Capacity - 1 x 16mm²
- Maximum Depth - Metal/Plastic/PVC Box - 35mm
- Rear projection 20mm approx.
- Neon indicator & mechanical pull on/off identification

g	45A	v
148	2P	250

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
Ø73 x 45mm

Fixing Centre
n/a

Minimum Box Depth
n/a



Code: **AXMCP52**

Ceiling Switch 2 Way 10A

- Designed for use in bathrooms
- Operates on mains and low voltage lighting
- Direct retrofit for conventional pull-cord
- Terminal Capacity - 2 x 1.5mm² / Rated Load Capacity - 6A
- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Supplied with M3.5 x 30mm fixing screws

g	6A	v
73	1P	240

Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

SOCKETS

Cooker Sockets (45Amp)

NEW



Dimensions
85 x 85 x 11mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMCS45**

45A Cooker Switch (Double Pole)

- 45Amp D.P. main switch with 13Amp socket
- Terminal Capacity - 2 x 10mm², 1 x 10mm² each
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 86 x 11mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMCS45N**

45A Cooker Switch + Neon (Double Pole)

- 45Amp D.P. main switch + Neon with 13Amp socket
- Terminal capacity - 2 x 10mm², 1 x 10mm² each
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 146 x 11mm
Fixing Centre
120.6mm
Minimum Box Depth
25mm



Code: **AXMCS45SK***

45A Cooker Switch Socket (Double Pole)

- 45Amp D.P. main switch with 13Amp socket
- Terminal capacity - 2 x 10mm², 1 x 10mm² each
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 146 x 11mm
Fixing Centre
120.6mm
Minimum Box Depth
25mm



Code: **AXMCS45SKN***

45A Cooker Switch Socket + Neon (Double Pole)

- 45Amp D.P. main switch with 13Amp socket
- Terminal capacity - 2 x 10mm², 1 x 10mm² each
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

NEW



Dimensions
86 x 86 x 11mm
Fixing Centre
60.3mm
Minimum Box Depth
47mm



Code: **AXMCOP45**

45A Cooker Outlet Plate

- Cable clamp accommodates 4mm² to 16mm² cable for 45Amp
- Terminal capacity - 3 x 2.5mm² for 20/25Amp
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Minimum order quantity: 10

Each

* Horizontal.

* Minimum order quantity 10



Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- White Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Terminal capacity - 3 x 2.5mm²
- Supplied with M3.5 x 30mm fixing screws and screw covers



Suitable for use in commercial & domestic environments

SPURS & CONNECTION UNITS

Spurs (13A)

NEW




Dimensions
86 x 86 x 13mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMSP**

Unswitched Spur 13A

- Flex outlet at lower edge by knockout (choice of use)
- Cable clamp accommodates 2.5mm² flexible cable
- Fitted with 13Amp Fuse unless specified otherwise
- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Terminal capacity - 3 x 2.5mm², 4 x 2.5mm² (Earth)
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 86 x 13mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMSPS**

Switched Spur 13A

- Flex outlet at lower edge by knockout (choice of use)
- Cable clamp accommodates 2.5mm² flexible cable
- Fitted with 13Amp Fuse unless specified otherwise
- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Terminal capacity - 3 x 2.5mm², 4 x 2.5mm² (Earth)
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

NEW



Dimensions
86 x 86 x 13mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMSPSN**

Switched Spur 13A + Neon

- Flex outlet at lower edge by knockout (choice of use)
- Cable clamp accommodates 2.5mm² flexible cable
- Fitted with 13Amp Fuse unless specified otherwise
- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Terminal capacity - 3 x 2.5mm², 4 x 2.5mm² (Earth)
- Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/200

Each

Minimum order quantity: 10

SPURS & CONNECTION UNITS

Connection Units (20A)

Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- White Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Terminal capacity - 3 x 2.5mm²
- Supplied with M3.5 x 30mm fixing screws and screw covers



g	1G	v
102	n/a	250

NEW



Dimensions
85 x 85 x 13mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: AXMFOP20
Flex Outlet Plate 20A

- Minimum Depth - Metal/Plastic/PVC Box 25mm
- Supplied with M3.5 x 30mm fixing screws

Minimum / Box quantity: 10/200
Minimum order quantity: 10

Each

MEDIA & COMMUNICATIONS

T.V. & Telephone Sockets

Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- White Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Supplied with M3.5 x 30mm fixing screws and screw covers



AXMTVS1



AXMSTVFO



AXMTVS2



AXMTFLM1



AXMTFLS1


Code	Description	Outlets	Dimensions (mm)	Fixing Centre (mm)	Minimum Box Depth (mm)	Weight	Min/Box	Each
1 Gang & 2 Gang								
AXMTVS1	1 Gang T.V. Socket (Surface)	1 Gang	86 x 86 x 9	60.3	25	n/a	10/200	
AXMSTVFO	1 Gang T.V. & SAT (Flush)	2 Gang	86 x 86 x 9	60.3	25	77g	10/200	
AXMTVS2	2 Gang T.V. Socket (Flush)	2 Gang	86 x 86 x 9	60.3	25	82g	10/200	

Code	Description	Outlets	Dimensions (mm)	Fixing Centre (mm)	Minimum Box Depth (mm)	Weight	Min/Box	Each
Master / Slave								
AXMTFLM1	Telephone Flush Master Socket	1 Gang	86 x 86 x 9	60.3*	25	69g	n/a	
AXMTFLS1	Telephone Flush Slave Socket	1 Gang	86 x 86 x 9	60.3	25	61g	10/200	

* Box supplied

Features & Benefits

- Approvals:- (ASTA, CE)
- Construction:- White Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Terminal capacity - 3 x 1.5mm²
- Supplied with M3.5 x 30mm fixing screws and screw covers

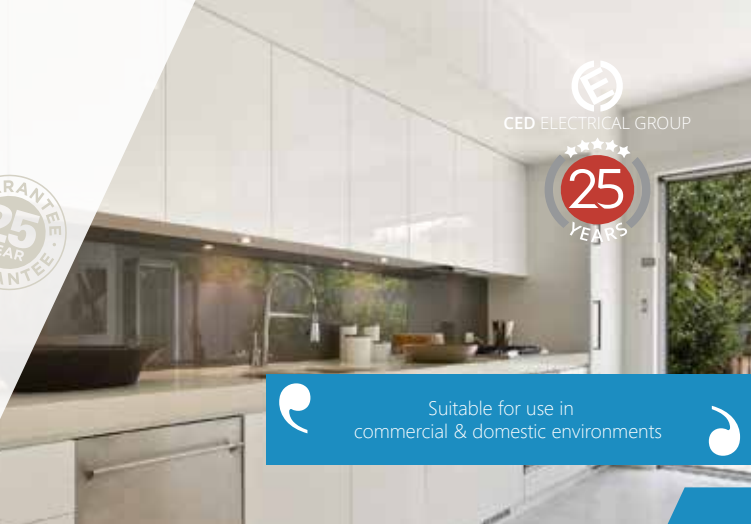

Suitable for use in commercial & domestic environments

NEW



Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMDP250/12W**

- 1 Gang 2 Way Push Dimmer 250W (Double Pole)
- 2 way dimmers are suitable for 1 & 2 way switching
 - Suitable for Tungsten Filament only
 - Minimum wattage dimming can be operated - 40W
 - Terminal Capacity - 1 x 1.5mm²
 - Minimum Depth - Metal/Plastic/PVC Box 25mm
 - Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/50
Minimum order quantity: 10

Each


NEW

Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMDP400/12W**

- 1 Gang 2 Way Push Dimmer 400W (Double Pole)
- 2 way dimmers are suitable for 1 & 2 way switching
 - Suitable for Tungsten Filament only
 - Minimum wattage dimming can be operated - 40W
 - Terminal Capacity - 1 x 1.5mm²
 - Minimum Depth - Metal/Plastic/PVC Box 25mm
 - Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/50
Minimum order quantity: 10

Each


NEW

Dimensions
86 x 86 x 9mm
Fixing Centre
60.3mm
Minimum Box Depth
25mm



Code: **AXMDP250/22W**

- 2 Gang 2 Way Push Dimmer 250W (Double Pole)
- 2 way dimmers are suitable for 1 & 2 way switching
 - Suitable for Tungsten Filament only
 - Minimum wattage dimming can be operated - 40W
 - Terminal Capacity - 1 x 1.5mm²
 - Minimum Depth - Metal/Plastic/PVC Box 25mm
 - Supplied with M3.5 x 30mm fixing screws



Minimum / Box quantity: 10/50
Minimum order quantity: 10

Each



AXMDLB2

AXMDLB145

NEW Features & Benefits

- Manufactured from flame retardant thermo-plastic material
- Knockout provided on the side & base for cable entry
- Supplied in 16mm (single) 25, 32 & 45mm depths (Single & Twin)
- 16mm box supplied with earth terminal

Dry Lining Boxes

- Will fit board thickness 6.35mm - 15mm and provide easy pull lugs for easy fixing to cavity wall installations
- Large flange around front sides to prevent slipping into cavity
- Manufactured from flame retardant thermo-plastic material
- Two side cable entry plus 25mm base knockout
- Back of the box can be used as template to mark box (cavity hole)
- Blue nylon lugs have one side lips to pull the lug easier with finger to grip the cavity wall



NEW



AXMDLB20

NEW



AXMDLB145

NEW



AXMDLB245

NEW



AXMDLB1

NEW



AXMDLB2


Code	Description	Outlets	Dimensions (mm)	Fixing Centre (mm)	Minimum Box Depth (mm)	Weight	Min/Box	Each
1 Gang & 2 Gang								
AXMDLB20	2 Gang Dry Lining Box (Dual)	2 Gang	145 x 83 x 35	120.6	35	52g	10/200	
AXMDLB145	1 Gang Dry Lining Box 45mm	1 Gang	83 x 83 x 35	60.3	47	49g	10/200	
AXMDLB245	2 Gang Dry Lining Box 45mm	2 Gang	145 x 83 x 47	120.6	47	75g	10/200	
AXMDLB1	1 Gang Dry Lining Box 32mm	1 Gang	83 x 83 x 35	60.3	35	36g	10/400	
AXMDLB2	2 Gang Dry Lining Box 32mm	1 Gang	145 x 83 x 35	120.6	35	52g	10/200	

* Minimum order quantity 10

NEW

Features & Benefits

- Approvals:- (CE)
- Construction:- Urea Formaldehyde
- Voltage:- 240v AC 50/60Hz
- Colour:- White
- Guarantee:- 25 Years

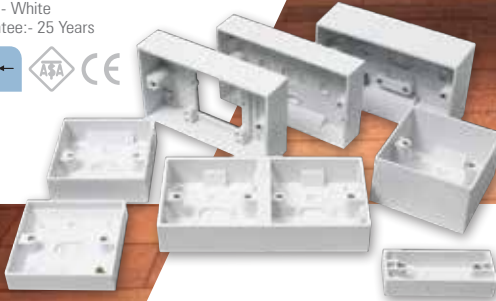

Suitable for use in
commercial & domestic environments

BOXES

Pattress Boxes

NEW



AXMPB116

NEW



AXMPB125

NEW



AXMPB225

NEW



AXMPB232

NEW



AXMPB232D

NEW



AXMPB132

NEW



AXMPB145

NEW



AXMPB245

NEW



AXMPBARC

Code	Description	ASTA Approved	Outlets	Knockouts (mm)	Dimensions (mm)	Fixing Centre (mm)	Box Depth (mm)	Weight	Min/Box	Each
1 Gang & 2 Gang										
AXMPB116	Pattress Box 16mm	✓	1 Gang	1 x each side / 1 x base	86 x 86 x 16	60.3	16	56g	10/200	
AXMPB125	Pattress Box 25mm	✓	1 Gang	1 x each side / 1 x base	86 x 86 x 25	60.3	25	71g	10/300	
AXMPB225	Pattress Box 25mm	✓	2 Gang	n/a	146 x 86 x 25	120.6	25	92g	10/200	
AXMPB232	Pattress Box 32mm	✓	2 Gang	1 x each side / 1 x base	146 x 86 x 32	120.6	32	116g	10/200	
AXMPB232D	Pattress Box Dual 32mm	✓	2 Gang (Dual)	1 x each side / 1 x base	145 x 83 x 35	120.6	35	61g	5/100	
AXMPB132	Pattress Box 32mm	✓	1 Gang	1 x each side / 1 x base	86 x 86 x 32	60.3	32	87g	10/300	
AXMPB145	Pattress Box 45mm	✓	1 Gang	1 x each side / 1 x base	86 x 86 x 47	60.3	47	113g	10/200	
AXMPB245	Pattress Box 45mm	✓	2 Gang (Twin)	n/a	146 x 86 x 47	120.6	47	182g	10/100	
AXMPBARC	Architrave Pattress Box	✓	1 Gang	1 x base	87 x 20 x 32	60.3*	32	31g	10/100	



CED
ELECTRICAL
GROUP

44-48 FRESHWATER ROAD,
DAGENHAM, ESSEX RM8 1RX (UK)
020 8503 8500
020 8503 8900
www.cedelectrical.co.uk
info@cedelectrical.co.uk